

FS602 EDGE TESTED ANCHOR LINE

The **FALL SAFE® FS602 - SHARP EDGE ANCHOR LINE** is equipped with 1 hook to connect into anchor point on structure and other to connect to front or dorsal D-Ring attachment on full body harness, fall protection vest or fall protection overall. It has a grab-on stainless steel fall arrester with automatic locking. FS602 was tested in a horizontal application, over a sharp edge ($r \geq 0.5\text{mm}$).



Tested in a horizontal application, over a sharp edge.



EAN CODE	LENGTH (M)	~WEIGHT (KG)
5605423800296	2	0,314
5605423321135	5	0,786
5605423320947	10	1,948
5605423321012	15	3,110
5605423320923	20	4,087
5605423800302	25	5,249

EAN CODE	COMBINATIONS	~WEIGHT (KG)
5605423321104	30	6,411
5605423321111	40	7,573
5605423321128	50	8,735
5605423321142	60	9,897
5605423320954	65	11,059

APPLICATIONS

Roof works | Construction | Wood poles | Tower climbing | Telecom towers | Scaffolding




STANDARDS

CE EN353-2:1992

CNB/P/11.074 (SHARP EDGE)

FS602 EDGE TESTED ANCHOR LINET

FEATURES

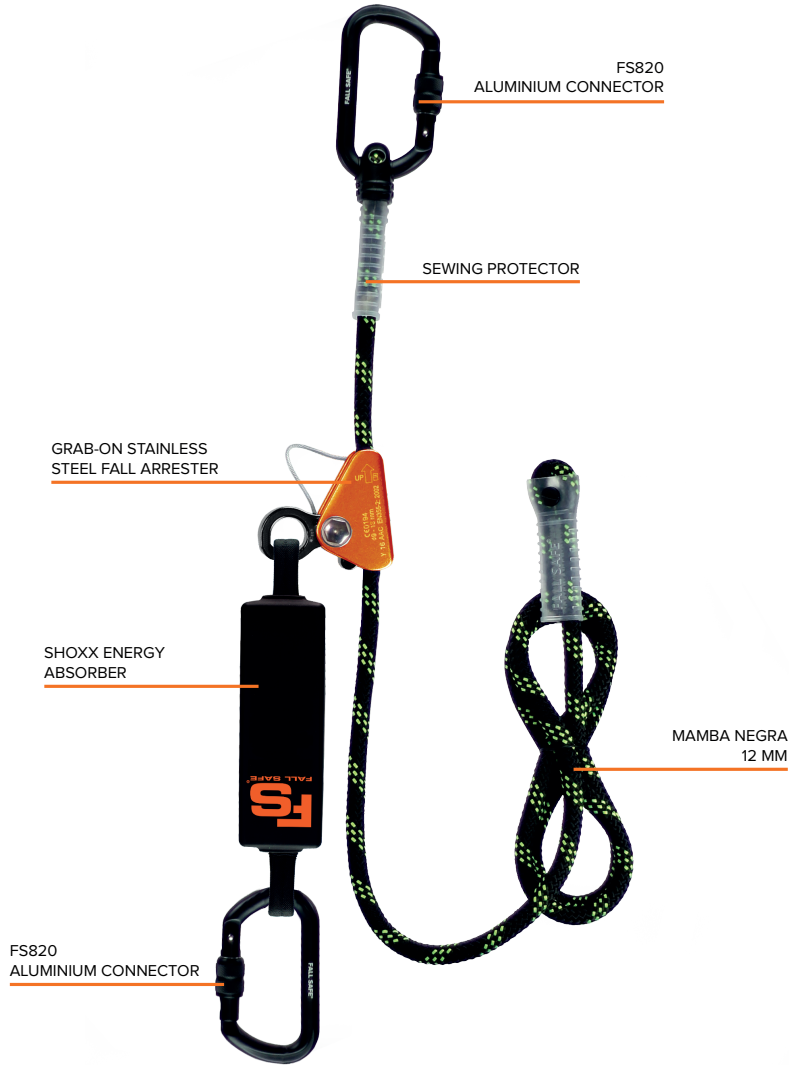

PHYSICAL PROPERTIES

Material Karabiners	Aluminium
Material Rope	Professional kernmantel rope 12mm
Energy absorber	100% polyester with silicon cover Limits arrest force below 6 kN

OTHER INFORMATION

Device lifespan	10 years
Max. Load	<100 Kg
Inspection requirement	Yearly
Traceability	Serial Number/ QR Code
Manual Instructions	www.fallsafe-online.com +351 252 480 060